



AIR CHUCKS



AIR HOSE



AIR STORAGE TANKS



AIRLINER GAUGES



BLOW GUNS



COUPLERS, FITTINGS



DRAINCOCKS



DRIVEWAY SIGNALS



FISHING TOOLS



VALVES



REPAIR TOOLS



TIRE GAUGES



VALVE CAPS



VALVE CORES




VALVE EXTENSIONS



VULCANIZER

VALVE CORES fit all standard tire valves

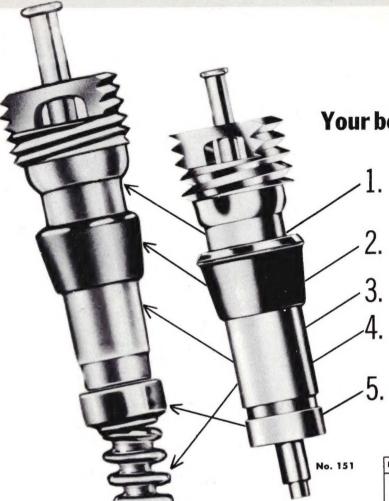

Your best buy - here's why:

Swivel construction prevents bruising of rubber gaskets when inserting and removing core.

Rubber gasket vulcanized and molded to core for absolute, everlasting seal.

All metal parts plated to prevent corrosion.

Special super fatigue-resistant stainless steel spring assures dependable service and long life. (Internal spring on short cores.)

Larger, deeper, stronger cup, lined with the best plate-gasket rubber that science has conceived.

ITEM NO.	DESCRIPTION	STD.PKG.	STD. WGT.
150 MB	Long Valve Cores — packed in metal box.	1,000 cores 5 in box 20 boxes to carton 10 cartons to container	5 lbs.
150 BK	Long Valve Cores — bulk packed.	500 cores 100 to carton 5 cartons to container	11/2 lbs.
151 MB	Short Valve Cores — packed in metal box.	1,000 cores 5 in box 20 boxes to carton 10 cartons to container	43/4 lbs.
151 BK	Short Valve Cores — bulk packed.	500 cores 100 to carton 5 cartons to container	11/4 lbs.

No. 150

MB means metal box packing BK means bulk box packing



ACME

Jor Accuracy

SINCE

1915

ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS 406 S. GRAND AVENUE LOS ANGELES 15, CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

VALVE CAPS





lo. 300

No. 301





202

No. 305

Acme valve caps are precision machined from solid brass. Result in a heavier, sturdier, longer lasting valve cap. Threads are deeper and more precise. Therefore, the seal is more air tight with less likelihood of lost caps due to vibration. Acme valve caps have been the choice of expert mechanics the world over for more than 40 years.

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
300PB	Short skirted cap. Turned from solid brass rod. Durably nickeled. Sealing surface remains airtight even after repeated ap- plication. Packed in paper box.	1,000 caps — 5 in box 20 boxes to carton 10 cartons to container	61/4 lbs.
300BK	Same as 300PB — bulk packed.	1,000 caps 100 to carton 10 cartons to container	51/4 lbs.
301PB	Turned from solid brass. Heavily nickeled with drilled center. Deeply knurled col- lar. Sealing surface stays airtight. Packed in paper box.	1,000 caps — 5 in box 20 boxes to carton 10 cartons to container	71/2 lbs.
301BK	Same as 301PB — bulk packed.	1,000 caps 100 to carton 10 cartons to container	61/2 lbs.
302BK	A low-priced cap of superior construc- tion. Machined from solid brass, Knurled and nickeled. Tight seat washer — bulk packed.	1,000 caps 100 to carton 10 cartons to container	5 lbs.
305РВ	Long skirted cap, covers entire valve thread to keep out dust. Brass, heavily nickel-plated. Positive-seal washer. Packed in paper box.	1,000 caps — 5 in box 20 boxes to carton 10 cartons to container	71/2 lbs.
305BK	Same as 305PB — bulk packed.	1,000 caps 100 in carton 10 cartons to container	71/4 lbs.
310	Valve Cap — Dome Type — Plastic	1M	11/4 lbs.





Specify "PB" after number for caps packed 5 to colorful paper box. Specify "BK" for bulk.



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES


2631 COMMERCE STREET DALLAS 26, TEXAS 1406 S. GRAND AVENUE LOS ANGELES 15, CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO.


61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

TIRE GAUGES

Complete Line

TIRE GAUGES*





COMPLETE LINE OF PASSENGER, TRUCK. TRACTOR AND SERVICE GAUGES .

ALL with NYLON BARS . . . ACCURATE . . . DURABLE . . . PRICED TO SELL!

* All individually packed.



NO. 540* Calibrated 10-120 lbs. in 2 lb. units * Has plated brass chuck head.

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
505	Tractor tire pencil gauge for air and wa- ter filled tires	10	11/4 lbs.
509	Professional tire pressure gauge	10	11/2 lbs
520	Pencil type gauge for truck tire service	10	11/4 lbs
540	Universal chrome-plated service gauge with 6" dual head extension	1	1/2 lb.



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4. COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH



from ACME...one of the

ORIGINATORS

of the pencil-type gauge

- To be used on any applications requiring extremely low pressure.
- Four sided white nylon bar with black numerals.
- Beautifully chrome plated.
- PARTICULARLY USEFUL FOR AIRLIFTS.



No. 521

(1 to 16 pounds in ½ pound units)

ADDITIONAL ACME PENCIL TYPE GAUGES — ALL WITH NYLON BAR

No. 505 — Calibrated from 5 to 50 lbs. Particularly designed for tractor use.

No. 509 — Calibrated from 5 to 50 lbs. For passenger cars and general use.

No. 520 — Calibrated from 20 to 120 lbs. Particularly designed for high pressure use.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
521	PENCIL-TYPE GAUGE TO BE USED ON ANY UNIT REQUIRING AN ACCURATE READING AT VERY LOW PRESSURE.	10	11/4 lbs.



ME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- **HUbbard 9-8550**

WAREHOUSES

2631 COMMERCE STREET 1406 S. GRAND AVENUE DALLAS 26, TEXAS LOS ANGELES 15. CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4, COLO.


61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

ACME PLASTIC VALVE CAPS

Offering an additional packaging of

NEW

ACMEQUIK-MOUNT TUBELESS TIRE VALVES*



ACME NO. 310-PLASTIC CAP

* Packed 50 of each number in a box. Each valve is equipped with our new black plastic valve cap.

NOTE: Original 10 Pak consists of 10 valves of each number in a box. Each valve is equipped with a plated machined brass cap.



SMOLE

DISPLAY-PAK OF EXTENSION CAPS

Packed 4 to a plastic box. Each box individually carded.

AVAILABLE IN 2 SIZES

ACME NO. 354 BX— $\frac{3}{4}$ " effective length ACME NO. 355 BX—1 $\frac{1}{4}$ " effective length

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.	RIM HOLE DIA.	RIM DIA.
253-50	TUBELESS TIRE VALVE	50	13/4 lbs.	5/8"	15"
254-50	TUBELESS TIRE VALVE	50	21/2 lbs.	5/8"	14"-15"
255-50	TUBELESS TIRE VALVE	50	2 lbs.	5/8"	15"
256-50	TUBELESS TIRE VALVE	50	1 1/2 lbs.	.453"	14"-15"
257-50	TUBELESS TIRE VALVE	50	13/4 lbs.	.453"	14"
258-50	TUBELESS TIRE VALVE	50	2 lbs.	.453"	14"
259-50	TUBELESS TIRE VALVE	50	2 lbs.	.453	14"
310	VALVE CAP—DOME TYPE—PLASTIC	1M	1 1/4 lbs.		
354 BX	4 NO. 354 IN PLASTIC BOX	25 CDS	21/2 lbs.		
355 BX	4 NO. 355 IN PLASTIC BOX	25 CDS	33/4 lbs.		

NOS. 354 AND 355 ALSO AVAILABLE IN BULK PACKAGING (25 TO BOX). ALSO MOUNTED ON EASEL DISPLAY CARD—12 PLASTIC BOXES OF 4 TO CARD. SEE OUR PRICE SHEET NO. 857W.

* Complete Interchange Chart available upon request.



ME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS 1406 S. GRAND AVENUE LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH



TUBELESS TIRE VALVES

ACME

QUIK-MOUNT
TUBELESS TIRE
VALVES*



ACME No. 253 (TR 415)



ACME No. 256 (TR 413)



ACME No. 257 (TR 414)



ACME No. 255 (TR 420)



ACME No. 258 (TR 418)



ACME No. 259 (TR 423)



ACME No. 254 (TR 425)

100% Protective Coverage ALL Models! ALL Years!

EXTENSION TYPE VALVE CAPS

UNIVERSAL TUBELESS TIRE METAL VALVES

ACME No. 251

FITS TIRES WITH 5/8"

RIM HOLE. HAS OVAL

AND ROUND WASHERS.

ACME No. 260

FITS TIRES WITH 5%"

AND .453" RIM HOLE.

USE APPROPRIATE

WASHERS.





No. 354 (EFFECTIVE LENGTH 3/4")



No. 355 (EFFECTIVE LENGTH 11/4")

SEVEN BRAND NEW SNAP-IN RUBBER COVERED TUBELESS TIRE VALVES FOR ALL PASSENGER CARS INCLUDING THE NEW 14" AND 15" RIMS.

TWO BRAND NEW EXTENSION TYPE VALVE CAPS TO FACILITATE AIR SERVICE.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.	RIM HOLE	RIM DIA.
253 (TR 415)	TUBELESS TIRE VALVE	10	1/2 LB.	5/8"	15"
254 (TR 425)	TUBELESS TIRE VALVE	10	1/2 LB.	5/8 "	14"-15
255 (TR 420)	TUBELESS TIRE VALVE	10	1/2 LB.	5/8 "	15"
256 (TR 413)	TUBELESS TIRE VALVE	10	1/2 LB.	.453"	14"-15
257 (TR 414)	TUBELESS TIRE VALVE	10	1/2 LB.	.453"	14"
258 (TR 418)	TUBELESS TIRE VALVE	10	1/2 LB.	.453"	14"
259 (TR 423)	TUBELESS TIRE VALVE	10	1/2 LB.	.453"	14"

^{*} Complete Interchange Chart available upon request.

ACME For Accuracy

SINCE

AE AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET 1406 S. GRAND AVENUE
DALLAS 26, TEXAS LOS ANGELES 15, CAL.

1915

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH



TUBELESS TIRE VALVE KITS

ASSORTMENT No. 261 for Full Coverage

CONTAINS:

10 No. 253 Rubber Valves

10 No. 256 Rubber Valves

5 No. 354 Extension Caps

2 No. 355 Extension Caps

"QUIK-MOUNT" SNAP-IN TUBELESS TIRE VALVES For .453" and %" Rim Holes.

Fit all 14" and 15" Rims.





EXTENSION TYPE VALVE CAPS

Effective Lengths 3/4" and 1 1/4'





UNIVERSAL METAL TUBELESS TIRE VALVE

for .453" and 5%" Rim Holes. Fits 14" and 15" Rims.

Use correct washer for each size.



EXTENSION TYPE VALVE CAP. Effective Length 3/4"



ASSORTMENT No. 262 for 95% Coverage

CONTAINS:


10 No. 260 Metal Valves 5 No. 354 Extension Caps

"DISPLAY PAK"



ACME Extension Type Valve Caps packed on attractive 2-color Display Card. Packed 48 to the Card . . . 12 plastic boxes of 4. Available: No. 354D—(Effective Length 34") No. 355D— (Effective Length 1 1/4").

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
261	RUBBER VALVE AND EXTENSION ASSORTMENT	1	1 1/4 lbs.
262	METAL VALVE AND EXTENSION ASSORTMENT	1	1 1/4 lbs.
354D	DISPLAY CARD OF NO. 354 EXTENSION	1	1 ½ lbs.
355D	DISPLAY CARD OF NO. 355 EXTENSION	1	2 lbs.

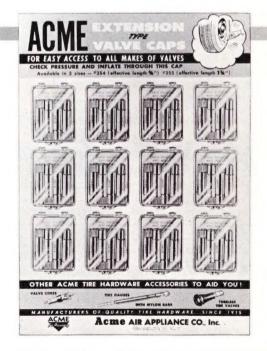



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- **HUbbard 9-8550**

S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26. TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15. CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 BTH STREET DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH



NEW TRUCK TUBELESS TIRE VALVES

STRAIGHT CLAMP-IN TYPE for Side Hole Mountings

- No special tools needed
- Repair and Service in the field simple easy
- Rubber washer and hex nut form airtight seal

These six valves will service truck tubeless tires with 3/8" side-hole mountable and demountable rims. Nos. 271 and 272 will service about 75% of the truck tubeless tires.

* For Repair Kit, see #270



No. 271 (TR 501)



No. 272 (TR 500)



No. 273 (TR 570)



No. 274 (TR 571)



No. 275 (TR 572)



No. 276 (TR 573)

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
* 270	ENVELOPE CONTAINING 10 RUBBER GROMMETS, 2 RING WASHERS, 1 HEX NUT	5	4 oz.
271	TRUCK TUBELESS TIRE VALVE - SIDE HOLE MOUNTING	10	1 lb.
272	TRUCK TUBELESS TIRE VALVE — SIDE HOLE MOUNTING	10	1 lb.
273	TRUCK TUBELESS TIRE VALVE — SIDE HOLE MOUNTING	10	1 1/4 lb.
274	TRUCK TUBELESS TIRE VALVE SIDE HOLE MOUNTING	10	1 1/4 lb.
275	TRUCK TUBELESS TIRE VALVE — SIDE HOLE MOUNTING	10	1 ½ lb.
276	TRUCK TUBELESS TIRE VALVE SIDE HOLE MOUNTING	10	1½ lb.



AE AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

WAREHOUSES

NEW ITEMS

VALVE INSERTING TOOL

Removing and Inserting Tool for Rubber-Covered Tubeless Tire Valves



CADMIUM PLATED STEEL TOOL

Complete Instructions Printed on Each Box

AIR CHUCK CLIP



No. 816

Air chuck clip used on ball foot type chucks. Holds chuck on valve during inflating process.

AIR-WATER ADAPTER





REDUCING BUSHING (Included With Each Adapter)



Connects water hose coupling and tractor air-liquid valve. Supplied with extra bushing for valves not equipped with removable core housing.

Full instructions enclosed. Individually boxed.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
211	AIR-WATER ADAPTER FOR TRACTOR TIRES	10	2 lbs.
265	TOOL (INSERT AND REMOVE) FOR TUBELESS TIRE VALVES	1	1 lb.
816	AIR CHUCK CLIP	10	12 oz.



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS 1406 S. GRAND AVENUE LOS ANGELES 15. CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO.


61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

CONVERTIBLE REPAIR VALVES AND TOOLS



For trucks, buses, road and farm equipment — Acme Screw-On Repair Valves assure speedy replacement of damaged or broken tire valves on all types of heavy mobile equipment.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
203 (TR1078A)	Bend Hgt. ¹⁵ / ₁₆ "; Horiz. length 5"; Base Diam. 1 ¹ / ₁₆ " Tube Sizes: 10.00/18; 11.00/20, 22, 24; 12.00/20, 22, 24; 10.00/18W, 20W, 22W, 24W; 11.00/20W, 22W, 24W; 12.00/20W, 22W, 24W.	25	4 lbs.
203W 👸	Same as No. 203 with bridge washer.	15	31/4 lbs.
204 (TR1 175A)	Bend Hgt. ¹⁵ / ₁₆ "; Horiz. Length 4½"; Base Diam. 1 ¹ / ₁₆ "; Tube Sizes: 9.00/18, 20, 22, 24; 10.00/15, 22, 24; 9.00/18W, 20W.	25	3¾ lbs.
204W	Same as 204 with bridge washer.	25	41/2 lbs.
205 (TR1177A)	Bend Hgt. ¹⁵ / ₁₆ "; Horiz. Length 334"; Base Diam. 1 ¹ / ₁₆ "; Tube Sizes: 7.50/15, 18, 20, 24; 8.25/15, 18, 20, 22, 24; 7.50/18W, 20W.	25	3½ lbs.
205W	Same as 205 with bridge washer.	25	41/4 lbs.
201	Holding tool—makes job of removing damaged tire valves easier and quicker.	10	1½ lbs.
880	Repair bushing—forms a permanent seal with screw-on repair valve. Bushings are supplied 3 to box of valves.	10	





ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550


U. S. WAREHOUSES

2631 COMMERCE STREET

1406 S. GRAND AVENUE Los Angeles 15, Cal. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4. COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

RUBBER VALVES



- · rubber valve section chemically and mechanically secured to metal insert for firm, permanent, air-tight bond.
- double sealing, yet mechanical bond alone is enough to assure complete and permanent air-tight seal.
- metal insert cannot be "blown out."
- can be vulcanized to natural or synthetic rubber tubes and takes long or short standard type cores.
- superior quality and design at no extra cost.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
TR15	Base Dia. $2\frac{1}{4}$ " Length $1\frac{4}{8}$ " Use on all 15 ", 16 " sizes up to and including 8.25 except $4.50/16$ and $4.75/16$.	10	₹ 10 oz. ∂
TR25	Base Dia. 21¼" Length 115/16". Use on all 17" tubes and on 5.25/18, 5.50/18, 6.00-18 DC Tubes.	10	€ 11 oz.
TR35	Base Dia. 21/4" Length 21/2" Use on all 19" and 22" tubes. For all 20" and 21" except 6.50/20, 10, 21 and 7.00/20, 21. Use on 5.50/18, 6.00/23, 30x3 and 30x31/2.	10	≨ 12 oz.
TR50	Base Dia. 21/4" Length 3 ^{17/3} 2". A hand bendable valve for use on all 4", 41/2", 6.50/20, 21; 33-34-35x5; 4.40/23; 15" and 16" light truck tires.	10	1 lb.
207	Standard tractor valve. Base Dia. 21/4" Length 25/16" Supplied with No. 209 brass protective sleeve and No. 301 cap. (Also for replacement on TR217, TR218 and TR2581 R valves.)	10	1¼ lb.
208	Removable core housing for valves.	10	5 oz.
210	Tractor tire valve. Base Dia. 2½" Length 1½" For 3.00-8 tubes.	10	11 oz.





ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- **HUbbard 9-8550**

WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15. CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4. COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

STANDARD SHORT TRACTOR VALVE



No. 206

The standard tire valve for Air Liquid Tractor Tires. Removable core housing permits quicker filling with antifreeze solution. (Specify No. 207 for stem length of 2\%".)

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
206	STANDARD TRACTOR VALVE. Base Dia. 21/4". Length 127/2". Supplied with No. 208 Removable Core Housing and No. 301 Cap.	10	1 ⅓ lb.

ADJUST-O-MATIC VULCANIZER



No. 1100

No. 1100 is particularly adapted for vulcanizing TR15, TR25, TR35, TR50 and tractor valves to tubes. Can also be used to vulcanize patches.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
1100	VULCANIZER AS DESCRIBED	1	8 lbs.
1150	HEATING ELEMENT REPLACEMENT	1	1 ½ lbs.

REPAIR TOOLS







No. 625





No. 610

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.		DESCRIPTION	STD. PKG.	STD. WGT.
600	4-purpose-tool—repairs and reconditions inside and outside valve threads; inserts and removes cores, Cadmium plated for maximum sales appeal and durability. Completely rust	50	2 lbs.	625	Valve fishing tool. Utilizes all the features of "2-in-1" tool in addition to the sturdy cable for working tire valve through rim hole.	10	1 lb.
	resistant.					1 to	
610	Combination valve core wrench and deflating pin. Sturdily constructed of solid stock. Deeply knurled for easy handling. Durable rustproof finish.		δ oz.	626	Fishing tool screws on valve stem. Holds valve and tube in position while tube is being inflated through tool.	10 enve- lopes to carton	l lb.



ACME AIR APPLIANCE CO., INC.

- U. S. WAREHOUSES
- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15. CAL.

1355 BUSH STREET SAN FRANCISCO, CAL.


1138 STH STREET DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

AIRLINER GAUGES

TOUGH, RUGGED PRECISION INSTRUMENTS!

The Airliner is the station gauge of field-proved dependability. Used daily in thousands of busy service stations.

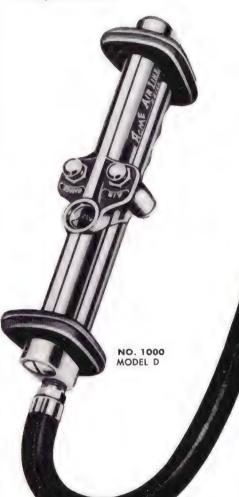

Above gauges can also be supplied with calibrations in kilograms.

COMPARE THESE FEATURES:

- Calibrated 10 to 120 lbs. in 2 lb. units.
- Straight line construction. Permits free air flow.
 Assures faster inflation and uniform accuracy.
- Rubber bumpers protect instrument.
- New reciprocating pressure indicator etched on aluminum. Easily read through magnifying "direct-view" lens.
- Impervo-sealed against external dirt and weather.
- Air filters at both ends prevent dirt from clogging gauge.
- Light. Weighs only two lbs.
- Guaranteed for 1 year against mechanical defects.



NO.	DESCRIPTION	STD. PKG.	STD. WGT.
1000 MODEL D	Airliner Gauge with No. 1025D hose assembly. Complete with dual extension chuck for hard-to-reach valves. Calibrated 10 to 120 lbs. in 2 lb. units.	1	2 lbs.
1000 MODEL R	Same as No. 1000D, but with swivel chuck No. 800. Calibrated 10 to 120 lbs. in 2 lb. units.	1	2 lbs.
1000 MODEL T	Tractor Airliner Gauge. Same superior mechanical features of the No. 1000 Airliner gauge. All internal parts and housing specially coated to prevent corrosive action of water and anti-freeze solutions in tractor tires.	1	2 lbs.



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550


U. S. WAREHOUSES

2631 COMMERCE STREET

1406 S. GRAND AVENUE LOS ANGELES 15. CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

AIRLINER REPAIR PARTS



ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
1020	Hose Assembly - 15" long. One end has 1/4" male pipe fitting, other has swivel.	1	6 oz.
1025-D	Same as 1020, equipped with No. 825S dual extension chuck.	1	3/4 lb.
1025	Same as 1020, equipped with No. 815 chuck.	1	½ lb.
1030	Same as 1020, equipped with No. 800 chuck.	1	½ lb.

CHECK ASSEMBLIES



(2 required)








(2 required)



889 screw nuts (2 required)




No. 826 replacement parts envelope for open chucks only. Used on Airliner 1000 Series gauges and No. 825S chuck.

No. 827 replacement parts envelope for closed chucks only. Used on 825 chuck.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
826	Envelope containing 2 887 neoprene washers 1 891 open deflator 2 889 screw nuts	10 envelopes	4 oz.
827	Envelope containing 2 887 neoprene washers 2 890 closed deflators 2 889 screw nuts	10 envelopes	4 oz.

AIRLINER REPLACEMENT PARTS



Cey	Item	Key No.	Item
7	Aluminum housing only.	19	Back end plug washer.
	(Machined, ready to take valves	20	Valve port washer.
	and parts.)	24	Air check spring.
2	Back end plug.	26	Air valve packing retaining spring.
3	Piston retaining plug.	29	Pressure spring.
4	Port plug.	51	Piston assembly.
5	Front end plug.	52	Screens.
7	Pressure indicator.	53	Rubber bumpers-2 required.
8	Crystal.	55	Air valve button assembly.
9	Snap ring.	56	Gauge valve button assembly.
16	Indicating pointer.	57	Air check.



ACME AIR APPLIANCE CO., INC.

U. S. WAREHOUSES

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

2631 COMMERCE STREET 1406 S. GRAND AVENUE

LOS ANGELES 15. CAL.


DALLAS 26, TEXAS

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

PORTABLE AIR TANKS







ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
2500	Light, portable tank withstands constant pressures up to 250 lbs.* Size: 8" x 16". Equipped with 15" No. 1030 hose assembly. Air capacity: Approx4 cu. ft. or 3.25 gal.	1	14 lbs.
2550	High capacity tank withstands constant working pressures up to 150 lbs.* Size: 12" x 20". Equipped with 48" No. 1025L hose and No. 815 universal chuck. Air capacity: 1.2 cu. ft. or 9 gal.	1	30 lbs.

Sturdily constructed air storage tanks of heavy, welded steel. Perfect air sources for on-the-spot inflation of tires on: autos • tractors • wheel barrows • trucks • bicycles Hundreds of other uses for:

home • garden and shop • paint and insecticide spraying • deodorizing • cedarizing • inflating sport and beach equipment

Ideal auxiliary for any contingency where air under pressure is needed. Each tank is individually hydrostatically tested. Handsomely finished in gray hammertone.

*No. 2551—Easy-to-read 2" gauge calibrated in 5 lb. units. Reads higher than tank capacity in conformance with industry practice.

TANK VALVES

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
2570	$\frac{1}{8}^{\prime\prime}$ pipe thread at end allows full valve extension.	10	5 6 oz. 5
2575	$\frac{1}{8}$ " pipe thread part way up permits minimum protrusion. $1\frac{5}{16}$ " long without cap.	10	6 ox.






No. 2570

No. 2575

Replacement unit with valve core and cap. Replaces most all air intake valves for tanks, compressors, air jacks, uplifts and other pneumatic devices. (Illustrations actual size.)

"SUPER-TUF" AIR HOSE



ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
725	25 feet long with 2 ferrules and 2 No. 850 male couplings.	1	4 lbs.
725A	Same as No. 725 plus 1 No. 815 Air chuck,	1	4 lbs.
7258	Same as No. 725 plus 1 No. 825 dual extension chuck.	1	41/2 lbs.
750 😂	50 feet long with 2 ferrules and 2 No. 850 male couplings.	1	8 lbs.
750A 🗐	Same as No. 750 plus 1 No. 815 Air chuck.	1	8 lbs.
750B	Same as No. 750 plus 1 No. 825 dual extension chuck.	1	81/2 lbs.
755	250-foot continuous length without connections.	1	42 lbs.
756	500-feat continuous length without connections on a sturdy reel.	1	83 lbs.



ACME AIR APPLIANCE CO., INC.

U. S. WAREHOUSES

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

2631 COMMERCE STREET 1406 S. GRAND AVENUE
DALLAS 26, TEXAS LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH




"RITE-RING" DRIVEWAY SIGNAL

- No Relay No Transformer No Contact Points to line up
- Replaceable coil can be installed in just a few moments ... ON THE SPOT!

(No need for entire unit to leave station for repairs)



Laboratory and field tested for over 40,000 trouble-free "rings" on up to 200 feet of continuous hose.



REPLACEABLE INDUCTION COIL ASSEMBLY

Can easily be replaced by any service station operator without the signal bell leaving the service station.



Mount in upright position

- Simple to install in a few minutes.
- Comes completely wired, ready to plug into 110 V A.C. outlet.
- Bell can be heard throughout the station whenever a car wheel passes over the hose.
- Bell will stop ringing if car stops on hose.
- No maintenance required.
- Guaranteed against defective material and workmanship.
- The "works" are completely encased for protection against elements.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
700	6" Bell Unit	Individually Boxed 6 to a Master Carton	2¾ lbs. each signal
705	Replaceable Coil Assembly	1	_
710	Signal tubing— 50 ft. coil	1	6 lbs.
711	Signal tubing— 100 ft. coil	1	12 lbs.



No. 710

No. 711



AE AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS 1406 S. GRAND AVENUE LOS ANGELES 15, CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

QUICK COUPLERS

For quick coupling and uncoupling of air tools and equipment. Push-pull action is instantaneous and airtight, Bodies have built-in automatic air shut-off valves, sealing line when nipples are disconnected; open when nipples are connected. Swivel construction eliminates hose kinks.

Unless combinations are specified we will ship 900B body with 901N nipple.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
901B	1/4" male	10	2 lbs.
902B	1/8" female	10	2 lbs.
904B	Hose barb for ¼" I.D. hose	10	2 lbs.
903B	⅓ ₈ " male	10	2 lbs.
900B	¼" female	10	2 lbs.
900N	1/4" female	10	1/2 lb.
902N	1/8" female	10	1/2 lb.
904N	Hose barb for ¼" 1.D. hose	10	1/2 lb.
903N	1/8" male	10	1/2 lb.
901N	1/4" male	10	1/ ₂ lb.



ADAPTERS

COUPLINGS & FITTINGS



No. 906

No. 905

No. 909

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
905	¼" double male I.P. thread	10	10 oz.
906	1/4" female, 1/8" male I.P. thread	10	71/2 oz.
907	1/4" female, 3/8" male I.P. thread	10	71/2 oz.
908	3/8" female, 1/4" male I.P. thread	10	20 oz.
909	1¼" double female I.P. thread	10	10 oz.

SCREW-IN FITTINGS







No. 801

No. 802

No.803

Positive gripping, will not blow off. Heavy brass fittings machined from solid stock, to fit 1/8" O.D. by 1/4" I.D. hose. Stem screws into hose sleeve. Does away with ferrules and special crimping devices.

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
801	1/4" male pipe thread	10	11/4 lbs.
802	1/4" I.D. 5/8" O.D. with hose coupling both ends.	10	1 3/4 lbs.
803	1/4" female pipe thread	10	1 1/4 lbs.

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
817	All-purpose swivel can be adapted to any number of applications	10	1 lb.
805	Pump connection for 3/16" I.D. hose	25	3/4 lb.
860	Female air hose coupling with swivel nut for $\frac{1}{4}$ " I.D. hose, $\frac{1}{4}$ " pipe thread.	20	1 lb.
850	Air chuck coupling with male pipe thread, for screw-on type chucks $-\frac{1}{4}$ " I.D. hose ($\frac{1}{4}$ " pipe th.).	20	1 lb.
851	Same as No. $850-$ for $\frac{1}{6}$ " I.D. hose ($\frac{1}{4}$ " pipe th.)	20	1 lb.
852	Same as No. $850 - \text{for } \frac{3}{8}$ " I.D. hose ($\frac{1}{4}$ " pipe th.)	10	½ lb.
853	Same as No. $850 - \text{for } \frac{1}{2}$ " I.D. hose $\frac{1}{4}$ " pipe th.)	20	1 1/4 lbs.
854	Same as No. $850 - \text{for } \frac{1}{4}$ " I.D. hose ($\frac{1}{8}$ " pipe th.)	20	³/₄ lb.
870	Hose repair coupling. Cut away damaged hose section and connect — for $\frac{1}{4}$ " inside diameter hose.	20	³¼ lb.
871	For 5/16" inside diameter hose.	20	1 1/4 lbs.
872	For 3/8" inside diameter hose	10	3/4 lb.
873	For 1/2" inside diameter hose	10	3/4 lb.



ACME AIR APPLIANCE CO., INC.

WAREHOUSES

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- **HUbbard 9-8550**


2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4. COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

AIR CHUCKS



ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
632	Air chuck nozzle for converting ball foot chuck for occasional use as blow gun. $1/4^{\prime\prime}$ pipe thread.	25	314 lbs.
800	With built-in swivel, especially designed for Airliner gauges.	10	1½ lbs.
806	For ¼" inside diameter hose.	20	2 lbs.
807	For 5/16" inside diameter hose.	20	2 lbs.
808	For 36" inside diameter hose.	20	2 lbs.
809	For ½" inside diameter hose.	20	21/4 lbs.
810	¼" male I.P. thread.	20	13/4 lbs.
815	¼" female pipe thread.	20	2 lbs.

REPLACEMENT PARTS FOR 800 CHUCK SERIES









884	Inflating pin & air chuck.	10	*
885	Flat neoprene rubber washer.	10	*
886	Screw-in nut.	10	*

*WEIGHT IS NEGLIGIBLE

DUAL EXTENSION CHUCKS


For hard-to-reach valves on dual truck and bus tires.



_	825 825A	Open chuck For ¼" male pipe thread. Closed chuck as above.	Individually packed 10 to container	31/4 lbs.
	8255	With burred stem built-in swivel for ¼" I.D. Hose.	Individually packed 10 to container	4 lbs.

See page No. 5 for replacement parts Closed checks used on 825. Open checks on 825S unless otherwise specified

BRASS FERRULES FOR AIR HOSE



		DIMENSIONS		wgt.
NO.	A LENGTH	B PERFORATION	C INSIDE DIAMETER	PER M
790	1/2"	9/32"	7/16"	21/2 lbs.
791	1/2"	11/32"	1/2"	3¾ lbs.
792	7/8"	1/2′′	0.620"	16 lbs.
793	7/8"	1/2"	0.640"	16 lbs.
794	7/8"	1/2"	0.660"	16 lbs.

or Accuracy SINCE

ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

BLOW GUN AND EXTENSION





No. 634

Pays for itself on first job. Tool of a hundred uses! For garages, service stations and shops. Answer to a mechanic's prayer. Dries wet ignition parts, blows out fuel lines, cleans away dust filings.

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
633	Aluminum blow gun, contour-molded for easy, comfortable grip. Equipped with standard neoprene chuck washers. Individually boxed.	10	21/4 lbs.
633D	Blow-Gun 10 Mounted on Display Card	1	21/4 lbs.
634	6" brass extension. Screws into gun barrel.	20	2 lbs.

HOSE NOZZLES



Ideal for automotive and industrial use! Heavy machined solid brass construction. One-hand operation. Will not jam. Only 1 moving part. Special mandrel built rubber for easy flexing. Brass screen keeps out pipe scale and dirt.

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
640	Fits $\sqrt[3]{4}$ garden hose thread. Packed in colorful display carton.	12	3 lbs.
641	Fits 1/4" male pipe thread.	10	21/2 lbs.



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15, CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, Colo. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

LONG WATER NOZZLES

AIR APPLIANCE CO.INC

REDI FLO!

NO DRIP!

NO WASTE!

BEND-IT FLOWS!

RADIATOR FILLER

RELEASE-IT STOPS!

ACME WATER NOZZLES
HEAVY MACHINED
SOLID BRASS CONSTRUCTION
HOSE END MOLDED RUBBER
ONE HAND OPERATION

No. 642

FOR HOME • FARM • SERVICE STATION
WATER LAWNS
CONSERVE WATER
CAR WASHING



No. 643 Hose End Only*

* Where water flow is required at higher pressure for steam cleaning, washing driveways, etc., use #643 with interchangeable brass head from #642 nozzle.

	ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
Ī	642	Fits 3½" G.H.T. Packed individually in colorful Master Display Carton	6	3¾ lbs.
	643	Fits brass head from #642 Packed individually in colorful Master Display Carton	6	13/4 Lbs.
	644	Same as #642. For high pressure use.	6	3¾ Lbs.




ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS 1406 S. GRAND AVENUE LOS ANGELES 15, CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

DRAIN COCKS

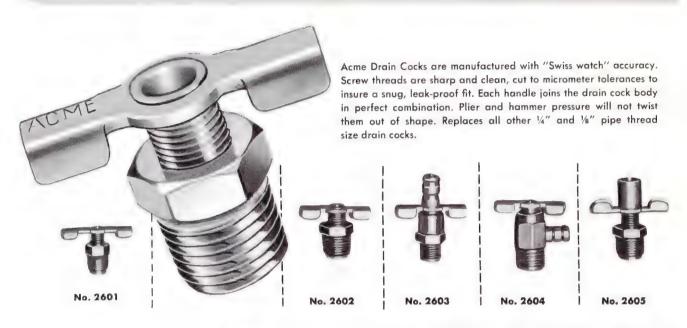

Attractive sight-selling counter display card. Each card individually packaged in strong, protective carton.



ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
2601	$\frac{1}{8}$ " standard pipe thread. This item and No. 2602 will fit about 95% of all vehicles serviced by the average shop.	25	3/4 lb.
2602	$\frac{1}{4}$ " standard pipe thread. This item and No. 2601 will fit about 95% of all vehicles serviced by the average shop.	25	1/4 lbs.
2603	${1\!/}_8$ " standard pipe thread with burred outlet for drain-off hose.	15	1 lb.
2604	$1/4^{\prime\prime}$ standard pipe thread with side burred outlet for drain-off hose.	15	½ lbs.
2605	1/4" standard pipe thread with drain-off tube.	15	1 lb.
2600	24 Drain Cocks mounted on a display board consisting of 10 No. 2601, 10 No. 2602, 2 No. 2603, 1 No. 2604, and 1 No. 2605.	1 display to a carton.	½ lbs. per cd
2610	24 Drain Cocks mounted on a display board consisting of 12 No. 2601 and 12 No. 2602.	1 display to a carton.	½ lbs. per cd
2611	24 Drain Cocks mounted on a display board consisting of 6 No. 2601 ½" drain cocks and 18 No. 2602 ¼" drain cocks.	10 individually boxed to a stand- ard container.	1½ lbs per cd
2612	24 No. 2602 ¼" Drain Cocks mounted on a display board.	10 individually boxed to a stand- ard container.	1¾ lbs per cd



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

TIRE VALVE STEM GUARDS










Nickel-plated valve stem guards install in an instant. Simply remove chrome wheel disc, screw valve cap down tight on guard. 2 sizes fit most cars. Special assortments available on order.

NO.	DESCRIPTION	STD. PKG.	STD. WGT.
225BK	7/8" Diam. at base.	20	3½ oz.
226BK	1" Diam. at base.	20	5 oz.
225D	Valve stem guard display—100 No. 225 stem guards packed 4 each in clear envelopes mounted on colorful easel display.	1 card to carton	13/4 lbs.
226D	Valve stem guard display—100 No. 226 stem guards, packed as above.	1 card to carton	2 lbs.
2270	Valve stem guard display—100 combination— 60 No. 225 stem guards 40 No. 226 stem guards packed as above.	1 card to carton	2 lbs.

VALVE EXTENSIONS





Perfect for elongating valves on cars with full wheel discs or simulated wire wheels. Install in an instant—screw into original valve. Tip of extension is threaded for valve cap. Precision machined from brass rod. All other parts of brass except hard rubber air sealing gaskets.

ITEM NO.	DESCRIPTION	STD. PKG.	STD. WGT.
348	Extends valve $^{23}\!\!/_{32}{''}$	25	8 oz.
349	Extends valve 15/6"	25	¾ lb.
350PB	Extends valve $\%_6{''}\dagger$	5 in box 20 boxes to carton	1½ lb.
350BK	Extends valve %6"†	50	12 oz.
351	Extends valve 113/32"	10	5 oz.
352	Extends valve $2\frac{7}{32}$ "	10	8 oz.
353	Extends valve 31/6"*	10	1 lb.

*Does not include γ_8 " overlap over valve to counteract centrifugal force. Overall length: 4" †Eliminates removal of valve cap for inflation and deflation.



AE AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES


2631 COMMERCE STREET DALLAS 26, TEXAS 1406 S. GRAND AVENUE LOS ANGELES 15. CAL. 1355 BUSH STREET SAN FRANCISCO, CAL.

1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

ACME Tubeless Tire Valve Applications for all 1955, 1956, 1957 and 1958 model cars

ACME HAS THE SPECIFIC VALVE FOR EVERY TIRE.

FOR UNIVERSAL COVERAGE, WITH MINIMUM INVENTORY, USE ACME No. 261 AND/OR No. 262

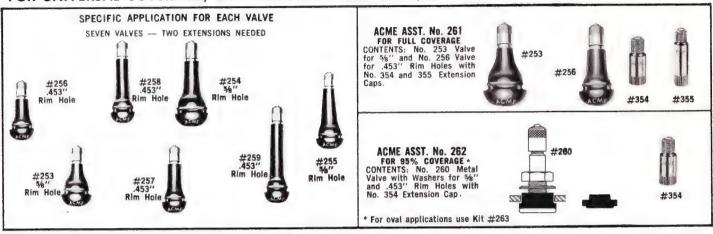

ALL 1958 & 1957 MODELS		Tubeless Meta Assortn	l Valve Application nent No. 262	Tubeless Rubbe Assortm	r Valve Application ent No. 261	Specific Valve And/Or Extension		
TIRE SIZES	Make and Model of Cars	Acme Valve Without Ext. for Std. Rim Covers	Acme Valve With Ext. for Deluxe Rim Covers	Acme Valve Without Ext. for Std. Rim Covers	Acme Valve With Ext, for Deluxe Rim Covers	for Standard and Deluxe Rim Covers	TR No.	
5.20 x 13	Metropolitan (Imported) 1958	260		256		256	TR 413	
5.90 x 15	Rambler 100 Rebel 6 1958	260		256	,	256	TR 413	
6.40 x 15	Studebaker Champion, Silver Hawk 6, '58, '57 Willys 4-DJ-3A, 1958, 1957 Studebaker Scotsman, 1958 Rambler 108 Rebel 6, 1958 Rambler 6, 1957	260	}	253	}	253	TR 415	
6.70 x 15	Rambler 8, 1957 Studebaker Commander, President, 1957 Studebaker Silver Hawk 8, '58, '57 Willys 6-226-2x4 1958, 1957 Corvette 1958	260	}	256	}	256 253	TR 413	
7.10 x 15	Buick 40 Special, 1958, 1957 Studebaker Golden Hawk, Pres. Classic, 1957	} 260	}	} 253	}	} 253	} TR 415	
7.50 x 14	Chevrolet (all except Sta/Wgn. & Conv.) 1958 Chevrolet (all 1957) Dodge Coronet 6, 8, 1958, '57 Ford (all 1958 except 9 pass. Sta/Wgn.) Ford (all 1957) Plymouth (all but Fury) '58, '57 (except 1958 3 seat Sta/Wgn.) Pontiac Chieftain '58, '57 Rambler 8, 108 Rebel V8—1958 Studebaker Golden Hawk, Commander '58	260 260 260 260 	260+355 Ext. 260+354 Ext. 260+354 Ext. 260+355 Ext. 260+354 Ext. 260+354 Ext.	256 256 256 256 } 256 256 	256+355 Ext. 256+354 Ext. 256+355 Ext. 256+355 Ext. 256+354 Ext. 253+354 Ext.	259, 256+355 Ext.* 258, 256+354 Ext.* 259, 256+355 Ext.* 259, 258, 256+354 Ext.* 259, 258, 256+354 Ext.*	TR 423, TR 413 TR 418, TR 413 TR 425 TR 413* TR 418, TR 413 TR 425 TR 413 TR 413 TR 415	
7.60 x 15	Buick Century, Super '58, '57 Packard Sedans 1957	} 260	}	} 253	}	253	TR 415	



E AIR APPLIANCE CO., INC.

- **205 NEWMAN STREET**
- HACKENSACK, NEW JERSEY
- **HUbbard 9-8550**

WAREHOUSES

1406 S. GRAND AVENUE DALLAS 26, TEXAS

SAN FRANCISCO, CAL.

DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

ACME Tubeless Tire Valve Applications for all 1955, 1956, 1957 and 1958 model cars

ACME HAS THE SPECIFIC VALVE FOR EVERY TIRE.

(Continued)

ALL 1958 & 1957 MODELS			al Valve Application ment No. 262		r Valve Application ent No. 261	Specific Valve And/Or Extension	
TIRE SIZES	Make and Model of Cars	Acme Valve Without Ext. for Std. Rim Covers	Acme Valve With Ext. for Deluxe Rim Covers	Acme Valve Without Ext. for Std. Rim Covers	Acme Valve With Ext. for Deluxe Rim Covers	for Standard and Deluxe Rim Covers	TR No.
	Studebaker Pres. 1958 Packard Sedans 1958 Chevrolet Sta/Wgns.,	} 260	}	} 253	}	} 253	} TR 415
8.00 x 14	Conv. 1958 Ford 9 pass. Station Wagons 1958 Dodge (all but Coronet) '58,'57	260	} 260+355 Ext.	256	256+355 Ext.	} 259, 256+355 Ext.*	TR 423, TR 413
	DeSoto Firesweep, '58,	}	260+354 Ext.	}	253+354 Ext.	254	→ TR 425
	Hudson Hornet '58, '57 Mercury (all except large motors and air cond.,) '58, '57	260		256 256	256+355 Ext.	256 259, 256+355 Ext.*	TR 413 TR 423, TR 413
	Nash Ambassador 8, '57 Plymouth Fury & 3 Seat Sta/Wgn. '58, '57	260	260+354 Ext.	256	253+354 Ext.	256 254	TR 413 TR 425
	Pontiac Super & Star Chief, 1958, 1957	260		256		256	TR 413
8.00 x 14	Thunderbird 1958 Chrysler Windsor (except Sta/Wgn.) 1958	260	260+354 Ext.	256	253+354 Ext.	256 254	TR 413 TR 425
	Rambler Ambassador V8 1958	260	000 055 5.4	256	050 - 055 5 4	256	TR 413
	Edsel "EF", Pacer Ranger 1958 Packard (all) 1958	260 260	260+355 Ext.	256 253	256+355 Ext.	259, 256+355 Ext.*	TR 423, TR 413
,	Buick R.M. '58, '57	260	**********	253		253 253	TR 415
8.00 x 15	Cadillac 62, 60 Spcl. '58,		260+354 Ext.		253+354 Ext.	255	TR 420
0.00 % 10	Continental 1957 Lincoln (all) 1957	}	} 260+354 Ext.	}	} 253+354 Ext.	} 254	} TR 425
8.20 x 15	Cadillac 75, 1958, 1957		260+354 Ext.		253+354 Ext.	255	TR 420
8.40 x 15	Cadillac Brougham 1958		260+354 Ext.		253+354 Ext.	255	TR 420
	Edsel "EM", Citation, Corsair 1958	260	260+355 Ext.	256	256+355 Ext.	259, 256+355 Ext.*	TR 423, TR 413
8.50 x 14	Mercury w/air cond. or large motors 1958			256	256+355 Ext.	259, 256+355 Ext.*	TR 423, TR 413
	Pontiac Sta/Wgns., and air cond.	260	*********	256		256	TR 413
	Chrysler Windsor 1957 Chrysler Saratoga 1958, 1957	}	260+354 Ext.	}	253+354 Ext.	254	TR 425
	Firedome '58, '57 Oldsmobile 88, 98 Sedans '58, '57	260	J	256		256	TR 413
9.00 x 14	Chrysler New Yorker 1958, '57		260+354 Ext.		253+354 Ext.	254	TR 425
	Oldsmobile Conv., '58, & '57 (air cond. models)	260		256		256	TR 413
9.50 x 14	Lincoln (all) 1958 Continental 1958 Chrysler Imperial 1958, 1957	}	} 260+354 Ext. 260+354 Ext.	}	} 256+354 Ext. 253+354 Ext.	} 257 254	} TR 414 TR 425
11.00 x 14	Chrysler Imperial (optional) 1958		260+354 Ext.	***	253+354 Ext.	254	TR 425

ALL 1956 MODELS — Take #260 Metal Valve or #253 Rubber Valve except Cadillac, Chrysler Imperial, Lincoln and Mercury which take #260 or #253 + 354 Extension Cap.

ALL 1955 MODELS — Use #260 Metal Valve or #253 Rubber Valve.

* When models are equipped with Special Deluxe Ornamental Rim Covers, the requirements may be for #256 Rubber Valve plus #354 or #355 Extension Cap.



E AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15, CAL. 1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH



Manufacturers Numerical Interchange Chart

Schrader	ACME	Dill	ACME	Bridge- port	ACME	Milton	ACME	Tru-Flate	ACME
15R	TR15	R15R	TR15	7R	310	107	633	T7R	310
15CR	210	R15CR	210	15CR	210	108	634	T15CR	210
25R	TR25	R25R	TR25	16	887	112	632	T66	626
35R	TR35	R35R	TR35	17	885	300	640	T67	600
54-10	253	R50R	TR50	27	884	350	641	T68	610
54-50	253-50	R215CR	207	29	886	363	850**	T80R	301(BK
55-10	254	SK2042	2575	30	827	375	642	T80S	301PB
55-50	254-50	T13R	256	36	853	400	825A**	T95R	300(BF
150R	TR50	T14R	257	37	852	495	806**	T95S	300(PI
413R-10	256	T18R	258	38	851	499	815**	T130	353
413R-50	256-50	T20R	255	39	850	508	1030**	T150R	TR50
414R-10	257	T23R	259	42	860	509	1025-D	T151R	TR15
414R-50	257-50	T25R	254	44	872	510-4	888A**	T165R	253
418R-10	258	T151R	253	45	871	510-6	887	T171	349
418R-50	258-50	VS185R	251	46	870	676	870**	T172	351
420R-10	255	VS307R	205	47	873	711	900B/901N*	T173	352
420R-50	255-50	VS308R	204	55	809	715	900B*	T175R	254
423R-10	259	VS309R	203	56	808	716	901B*	T176R	255
423R-50	259-50	VS418R	205W	57	807	726	903N*	T183R	256
501	271	VS419R	204W	58	806	727	901N*	T184R	257
505	265	VS420R	203W	60	810	728	9001/1*	T188R	258
570	273	VS710-R	260	62	815	729	902N*	T193R	259
571	274	VS-900-500-R	272	65	825A	866	886	T218CR	207
572	275	VS-900-501-R	271	66	626	867	885	T251R	TR25
573	276	VS-900-570-R	273	67	600	868	885	T313	350
595	272	VS-900-571-R	274	68	610	921	509	T314	354
595-103	270	VS-900-572-R	275	80R	301(BK)	950	530	T315	355
645A6	2570	VS-900-573-R	276	80S	301(PB)	976	540**	T351R	TR35
660V	310	100-AABoxed	151MB	130	353			T506	265
880MB	301PB	100-AABulk	151BK	140	633	******	l but not	T509	1100
880V	301BK	331	353	150R	TR50	-	changeable	T600R	302(B)
990	261	339	349	151R	TR15	intere	changeable	T772R	305(B)
992	265	350	352	165R	253	***	ne is brass.	T790R	151(B)
1020A	1000	356	351	171	349	**ACI	ie is brass.	T790S	151MI
1020B	1000D	641Boxed	301PB	172	351			T792R	880
1468A6	2575	641Bulk	301BK	173	352			T799R	201
2030A-82	1025	643	302BK	175R	254			T952R	208
2030-42	1025D	655	305BK	176R	255			T955 T2016-R	211 260
2030-44	1020	658Boxed	305PB	183R	256			T2016-R T2057R	251
2866	885	658Bulk	305BK	184R	257			T3006A	203W
3263	600	0250	2570	188R	258	1		T3010A	204W
3640-K2	260	5058	633	193R	259			T3010A	205W
3640K-10	262	5215	265	218CR	207	1		T3206A	203W
3670	1100	6001	600	223	900B*			T3210A	204
3680C	354	6041	807	238	901N*			T3212A	205
3680G	355	6042	808	239	900N*			T5200-6R	272
3696	801	6043	809	240	904N* TR25			T5201-6R	273
3744	880	6044	815	251R	CONTROL SECTION CONTROL CONTRO			T5202-6R	274
4000MB	150MB	6045	810	313R	350			T5203-6R	275
4000 V	150BK	6052	806	314R	354	1		T5204-6R	276
4337K3	251	6091	850	315R	355			T5205-6R	271
4365	350BK	6092	851	*emial	but not			200	640
4464	201	6093	852					201	641
5050A	525	6094	853	interch	angeable	1		201	



ACME AIR APPLIANCE CO., INC.

- **205 NEWMAN STREET**
 - HACKENSACK, NEW JERSEY
 - **HUbbard 9-8550**

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26, TEXAS

1406 S. GRAND AVENUE LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 STH STREET DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

Manufacturers Numerical Interchange Chart

(continued)

Schrader	ACME	Dill	ACME	Bridge- port	ACME	Milton	ACME	Tru-Flate	ACME
6492 6492 -2 6492 -2 6492 -3 6493 6494 6495 6497 6499 6060 6284 6300V 6358 6361 6362 6366 6366 6366 6366 6366 6366	809 884 886 808 807 806 810 815 530 352 302BK 351 853 852 851 850 816 633 540 353 632 860 610 873 872 871 870 349 509 205 203 204 305(PB) 305(PB) 305(PB) 305(PB) 305(BK) 901N* 903N* 900B* 520 626 825A 887 890 889 827 906 907 908 909 909 900N* 825 151(MB)	6156 6172 6172RP 6241Boxed 6241Bulk 6241G 6304 6388 6389 6390 6391 6438A 6489B 6490 7206 7212 7213 8808 8852 8909	887 825A 827 350(PB) 350(BK) 354 355 1100 870 872 871 873 211 208 209 540 520 509 880 889 625	351R 400 402 403 506 509 600R 772R 790S 792R 955R 2016R 2057R 3006A 3010A 3210A 3210A 3210A 5200-6R 5201-6R 5202-6R 5203-6R 5205-6R	TR35 509 505 540 265 1100 302(BK) 305(BK) 151(BK) 151MB 880 208 211 260 251 203W 204W 205W 203 204 205 272 273 274 275 276 271			308 310 310 5/16 310 3/8 310 1/2 314 314 5/16 314 3/8 314 1/2 317 330 331 350 351 351-D 351-E 351-F 352 354 400 701 702 703 705	854 850 851 852 853 870 871 872 873 860 801 802 815 806 807 808 809 825A 810 633 520 540 505 515



ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES


2631 COMMERCE STREET 1406 S. GRAND AVENUE
DALLAS 26, TEXAS LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL.

DENVER 4, COLO.

61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH

Since 1915

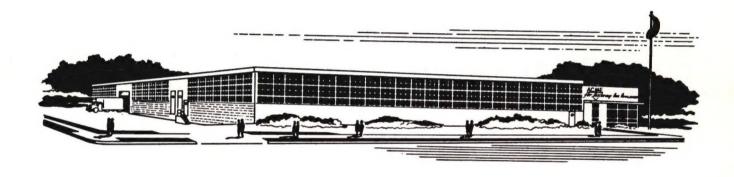

ACME

SINCE 1915

ACME AIR APPLIANCE CO., INC.

- 205 NEWMAN STREET
- HACKENSACK, NEW JERSEY
- HUbbard 9-8550

U. S. WAREHOUSES

2631 COMMERCE STREET DALLAS 26. TEXAS 1406 S. GRAND AVENUE LOS ANGELES 15, CAL.

1355 BUSH STREET SAN FRANCISCO, CAL. 1138 8TH STREET DENVER 4, COLO. 61 E. 7TH ST., SOUTH SALT LAKE CITY, UTAH